

Manual Riparo



timber**lab**

natural outdoor solutions

www.timberlab.eu

Timberlab B.V.
Harskamperweg 32
6731 AB Otterlo

Follow this installation guide for a safe installation.

General

- Follow this installation guide for a safe installation.
- Installation and connection of the lighting armature should be done by a certified installer
- Disable main supply before starting installation activities!
- Timberlab is not responsible for adjustments or modifications on the armature
- The armature is not dimmable!
- The earthing will be (is) connected to the RVS lid
- We do not recommend the use of concrete mortar for filling in the area around the column. If necessary/derivable, depending on the type of soil a stabilising sand can be applied.

Maintenance advice

The wood does not require any maintenance. In the course of time, the wood will grey in a natural way. If a treatment is chosen, a moisture regulating surface treatment should always be applied. Ask your supplier for advice! If desired, the LED module can be cleaned with a soft brush.

Warranty

The product comes with a two-year guarantee. Wood is a natural product. This wood is, unless expressly stated otherwise, fresh, undried, sawn and/or planed (if applicable). No further woodworking was performed. There is always a chance of warping and/or (dry) cracking of the wood. This may occur upon delivery or later. This is not a production error but a natural characteristic of the wood. Warranties do not apply for this.

Product	Wood species	Certification	In ground/ post holder	Colour temperature	Version	Voltage	Variations
				K		VAC	
Riparo (45)	Accoya (4)	N/A (0)	L1+1000mm (00)	3.000 (2)	32mm hole (0)	230V (1)	N/A (00)
		FSC (1)	L1+PH09 (09)	4.000 (3)	with cable (1)		socket (02)
			L1+PH010 (10)				Connection box (08)
			L2+PH09 (09)				
			L2+PH10 (10)				

The product code is generated by selecting the options and taking the number in brackets ().




11-03-2022




Riparo incl cable


1. Drilling
Drill or dig holes in the ground.




2. Place
Place the Riparo in the hole.

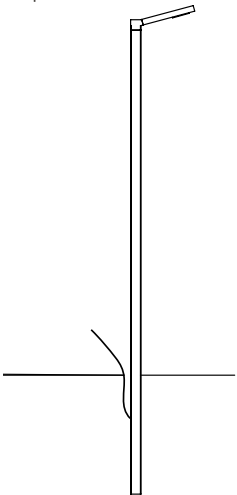


3. Digging
-Dig out to 40cm deep.
Make sure there is no voltage on the ground cables
-Place the ground cables



4. Connect

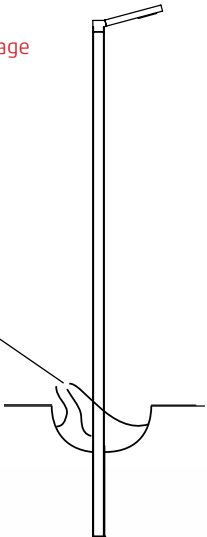


5. Finishing
-Straighten the pole with the help of a spirit level.
-Close the hole in the ground.

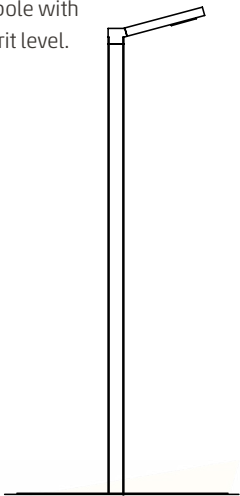


Riparo excl cable


1. Drilling
Drill or dig holes in the ground.




2. Place
Place the Riparo in the hole.

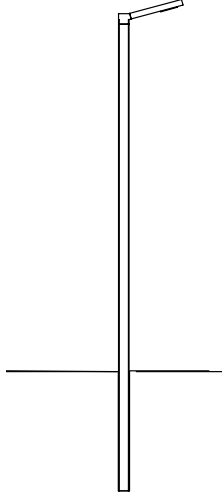


3. Digging
-Dig out to 40cm deep.
Make sure there is no voltage on the ground cables
- Place the ground cables.
- Feed the cables through the Riparo.



4. Connect

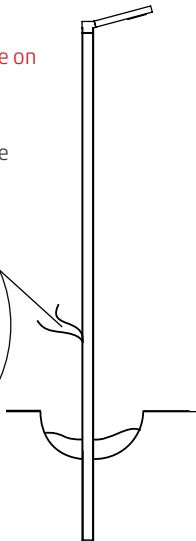

5. Finishing
- Straighten the pole with the help of a spirit level.
- Close the hole in the ground.

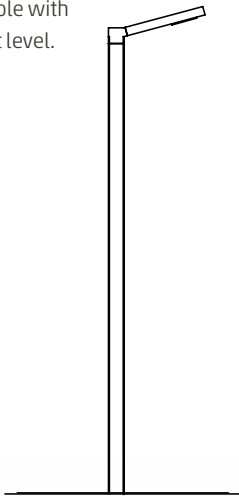

11-03-2022